

Surface & Suspended



Low Glare Diffuser



BESA Mounting Points




Steel Housing




Conduit Side Entry

Dimensions

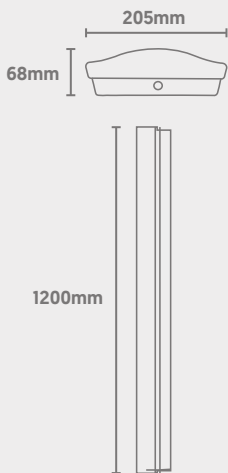

Photometric Data

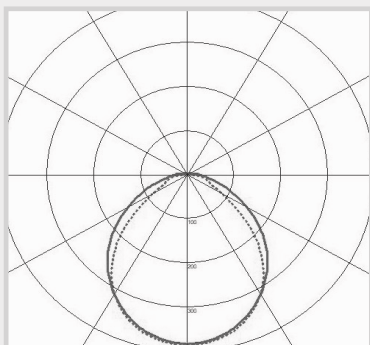

Proteus

Prismatic Linear

QVIS[®]
LED LIGHTING

CODE: P2-WS-1200NW/EM



Power	Efficacy	Output	Kelvin
24W [Emergency 3W]	160Lm/cW	3840Lm [Emergency 480lm]	4000K
30W [Emergency 3W]	160Lm/cW	4800Lm [Emergency 480lm]	
36W [Emergency 3W]	160Lm/cW	5760Lm [Emergency 480lm]	
42W [Emergency 3W]	160Lm/cW	6720Lm [Emergency 480lm]	

Technical

Input Voltage	AC 220-240V
Diffuser Type	Microprismatic
Colour Rendering Index	>85
Power Factor	0.9821
Operating Temp.	-20 to +65°C
Materials	Steel & Polycarbonate
IP Rating	IP40
Dimmable	On Request
Dimensions	1200mm x 205mm x 68mm
Weight	3.37kg
MacAdam Step	<3
Emergency Output	3 Hours [3W]
Lifetime	50,000 hours, L90-B10 (Ta 25 °C)
CE Standards	EN60598-1, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS